


SERVERTECH

Cabinet Power Distribution Units (CDUs)

綠能機房的最佳選擇
(業界最全方位的PDU專門管理解決方案)

產品特色

- 可透過Web 瀏覽器直接檢視數位排插的即時用電量
- 每一個CDU可以透過TCP/IP連接, 藉由TCP/IP乙太網路將用電量傳至中控台, 集中記錄分析
- 當有電力事件發生時可透過Mail、SNMP Traps等機制及時通知管理者
具有過載斷電保護(Branch circuit protection)-Breakers/fuses選擇, Breakers最大承受電流20A (他牌16A)
- 提供具Fail-Safe Transfer Switch (FSTS)機種:
即 Fail-Safe Power Redundancy 功能, 具負載平衡功能不易於機櫃內產品熱能及電力耗損, 安全切換不同迴路供電, 讓設備不因電力中斷而停機, 提供N+1備援功能。比傳統ATS更安全
- Smart Load Shedding (智慧負載釋出):
當市電停電、溫度過高、負載過重時, 搭配原廠所附的" Remote shutdown Agent", 可事前設定要關掉哪些設備, 當事件發生時就會主動關掉不重要的設備。讓重要的設備能持續運轉
- 通過UL認證

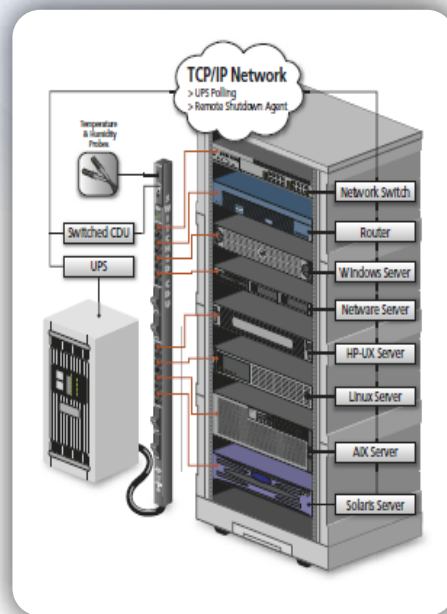

交錯相位設計



90°旋轉使用電源線



客製化顏色



環境感應sensor

Server Technology PDU 系列產品功能比較表

	每個插座 電源監控	分支 電路保護	輸入電流 監控	環境 監測	存取安全 通信	擴充 模組	個別插座 控制
基本型PDU		✓					
計量型PDU		✓	✓				
智慧型PDU		✓	✓	✓	✓	✓	
開關型PDU		✓	✓	✓	✓	✓	✓
智慧型監控PDU	✓	✓	✓	✓	✓	✓	
開關型監控PDU	✓	✓	✓	✓	✓	✓	✓
遠端電源管理				✓	✓	✓	✓



Metered



Model	Available Input Voltages	Amperage	Available Input Cord	Outlets	Dimensiond (LxWxD)
C-10H1-C20M	100-120V 50/60Hz	20A	IEC 60320/C20 Power Inlet	(10)NEMA 5-20R	17.0x1.75x5.0 in (431x44x127mm)
C-10H1-L30M	100-120V 50/60Hz	30A	NEMA L5-30P Cordset 10ft(3m)	(10)NEMA 5-20R	17.0x1.75x5.0 in (431x44x127mm)

Switched



Model	Available Input Voltages	Amperage	Available Input Cord	Outlets	Dimensiond (LxWxD)
CW-8H1A113 CX-8H1A113*	100-120V 50/60Hz	20A	IEC 60320/C20 Power Inlet	(8)NEMA 5-20R	1.75x17.2x7.0 in (431x44x127mm)

*CX refers to the Expansion Module

Switched



Model	Available Input Voltages	Amperage	Available Input Cord	Outlets	Dimensiond (LxWxD)
CW-16H1A454 CX-8H1A454*	100-120V 50/60Hz	20A	IEC C20/C20 Power Inlet	(16)NEMA 5-20R	3.5x17.2x7.00 in (89x437x178mm)
CW-16H1B454 CX-8H1B454*	100-120V 50/60Hz	30A	NEMA L5-30P Plug 10'(3m)Cord	(16)NEMA 5-20R	3.5x17.2x7.00 in (89x437x178mm)

*CX refers to the Expansion Module

Fail-Safe



Fail-Safe Transfer Switch CDU					
PTTS-H008-0-02M*	100-120V 50/60Hz or 208-240V 50/60Hz	20A or 16A	NEMA 5-20P L5-20P or IEC 60320/C13 Cord Set, 10 ft (3m)	(8)IEC 30320/C13	1.75"x8"x17" in (44x203x432mm)

Fail-Safe



Model	Available Input Voltages	Amperage	Available Input Cord	Outlets	Dimensiond (LxWxD)
CW-16HF2A452 CX-16HF2A452*	208-240V 50/60Hz	20A	(2)IEC C20 Power Inlet	(16)IEC60320/C13	17.2x3.5x10.0 in (437x89x254mm)
CW-16HF2C452 CX-16HF2C452*	208-240V 50/60Hz	30A	(2)NEMA L6-30P Plugs, 10'(3m)Cord	(16)IEC60320/C13	17.2x3.5x10.0 in (437x89x254mm)
CW-16HFEA452 CX-16HFEA452*	230V 50/60Hz	16A	(2)IEC C20 Power Inlets	(16)IEC60320/C13	17.2x3.5x10.0 in (437x89x254mm)
CW-16HFEA452 CX-16HFEA452*	230V 50/60Hz	32A	(2)IEC Blue 2P +G Plug 10'(3m)Cord	(16)IEC60320/C13	17.2x3.5x10.0 in (437x89x254mm)

*CX partnumber refers to the expansion CDU

48DC



-48V Switched 2x100A Inputs / 4x70A Outputs					
48DCWB-04 2X100-DONB	2)-48VDC (-40 to -60) Input Terminal Blocks(+/- &)	100A each, 200A total	None	(4)70A max outlets protected with TPC fuses (75A max)**	17"x3.5"x16" in (432x89x406mm) ***
48DCXB-04 2X100-DONB*					

台灣總代理

聯剛科技股份有限公司

台北總公司: 台北市信義路六段31號2樓 Tel: 02-2726-3239 Fax: 02-2728-1322
http://www.accordance.com.tw E-mail: sales@accordance.com.tw